

1、 Electrical Specification/电气特性

1.1、 SCOPE/概述

The document details the electrical, mechanical and environmental specifications of a SMPS, the power supply provides 15 W continuous output power.

资料详细描述了一款 15W(连续输出功率)开关电源的电气性,结构性及环境等要求.

The power supply shall meet the **RoHS** requirements.

此款电源符合 **RoHS** 要求.

Description/描述:

- | | |
|--|---|
| <input type="checkbox"/> SMPS Adaptor(Wall mount)/插墙式适配器 | <input checked="" type="checkbox"/> SMPS Adaptor(Desk-top)/桌面型适配器 |
| <input type="checkbox"/> Open Frame/开放式结构 | <input type="checkbox"/> SMPS Unit (With Case)/带铁壳型 |
| <input type="checkbox"/> Others/其他 | |

1.2、 Input Characteristics/输入特性

1.2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac with a single phase.

输入电压范围: 从 90Vac 到 264Vac, 单相输入.

	Minimum/最小	Rating/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100Vac~240Vac	264Vac
Input Frequency/输入频率	47Hz	60Hz/50Hz	63Hz

1.2.2. Input AC Current/输入交流电流

0.5Amax. @ 90Vac input & Full load/在 90Vac 输入和满载条件下最大 0.5A

1.3.3. Inrush Current (cold start)/浪涌电流(冷启动)

Power supply inrush current shall be less than the ratings of its critical components (including bulk rectifiers, fuses, and surge limiting device) under all conditions of line voltage of Section 2.1.

在 2.1 中所有输入条件下, 浪涌电流应小于关键器件的额定值(包括保险丝、桥整等浪涌限制元件)。

1.2.4. Average Efficiency /平均效率

While input 115Vac and 230Vac, the average efficiency is more than 81.4%.The test point is at 25%,50%,75% and 100% of max load respectively.(warm up after 30 minutes)

在输入 115Vac 和 230Vac 条件下, 平均效率不小于 81.4%。测试点分别是最大载的 25%,50%,75%和 100%。(热机半小时后测试)

1.2.5. No-Load Input Power Dissipation/输入空载功率损耗

While input 115Vac or 230Vac and the output is no load, the input power loss must be less than 100mW. 在输入 115Vac/230Vac, 空载功耗小于 100mW.

1.3、 Output Characteristics/输出特性

1.3.1.Static Output Characteristics <Vo & R+N>/静态输出特性<输出&纹波+噪音>

Output	Rated Load/额定负载		Peak Load	Output Range 输出电压范围	R+N 纹波与噪声	Remark 备注
Rating	Min. Load	Max. Load				
+5.0V	0A	3.0A	/	4.75V ~ 5.25V	100mVp-p	

Ripple & Noise: Tested by a oscilloscope using 20MHz bandwidth and the output is paralleled a 0.1uF ceramic capacitor and a 10uF electrolysis capacitor. (Under the input Voltage 100~240Vac)

纹波与噪声: 量测时示波器选用 20MHz 带宽限制,输出端要并联一颗 0.1uF 的陶瓷电容和一颗 10uF 的电解电容(输入电压 100~240Vac)

1.3.2.Line/ Load Regulation/线性/负载调整率

Output	Load Condition/负载条件		Line Regulation 线性调整率	Load Regulation 负载调整率	Remark 备注
Rating	Min. Load	Max. Load			
+5.0V	0A	3.0A	± 2%	± 5%	

1.3.3.Turn - on Delay Time/开机延迟时间

3S max. @90Vac input & Full load/在 90Vac 输入和满载条件下最大 3S

1.3.4. Hold-up Time/关机维持时间

10mS min. @ Full load & 115Vac/60Hz input turn off at worst case

在 115Vac/60Hz 输入,满载同时最差情况下关机, 最小 10mS

1.3.5.Rise Time/上升时间

200mS max. @ Full load/在满载条件下最大 200mS

1.3.6.Fall Time/下降时间

20mS max. @ Full load/在满载条件下最大 20mS

1.3.7.Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off/当电源开, 关机时最大 10%

1.3.8.Output Load Transient Response/输出负载瞬态响应

Output voltage within 4.5Vdc-5.5Vdc for load step from 25% to50%, 50%to75%, R/S: 0.1A/uS, frequency: 100Hz, duration: 8mS.

输出电压在 4.5Vdc-5.5Vdc 之间,负载变化: 从 25%到 50%,50%到 75%, 斜率: 0.1A/uS,频率:100Hz,持续时间为 10mS.

1.4、 Protection Requirements/保护要求

1.4.1.Over Current Protection/过流保护

OCP Point Limited: 3.3A~6.0A /保护点限制: 3.3A~6.0A

The output shall hiccup when the over current applied to the output, and shall be Self-recovery when the fault condition is removed

当过电流时,输出将进入打嗝模式,当过流情况解除后,产品将会自动恢复正常

1.4.2.Short Circuit Protection/短路保护

The input power shall decrease when the output is short to GND; the power supply shall

not damage, and shall be self-recovery when the fault condition is removed
当输出对地短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常

1.4.3.Over Voltage Protection/过压保护

The power supply shall be protected when the output is over voltage, and the power supply shall not be damaged

当输出过压时,产品保护且不会损伤

2、Environment Requirements/环境要求

2.1、Operating Temperature and Relative Humidity/操作温度和湿度要求

0°C to +40°C

5%RH to 95%RH

2.2、Storage Temperature and Relative Humidity/存储温度和湿度要求

-20°C to +70°C

5%RH to 95%RH (non-condensing) @ Sea level shall below 5,000 meter

在海拔低于 5,000 米的条件下,低温存储下限为-20°C (无结冰环境);高温存储上限为

+70°C,相对湿度为 5%RH to 95%RH。

3、Reliability Requirements/可靠性要求

3.1.Vibration/振动

5 to 500Hz sweep at a shift gears for 20 minute for each of the perpendicular axes X, Y, Z thereinto :acceleration frequency for 10 m2/s3 at 5~10HZ; acceleration frequency for 3 m2/s3 at 10~200HZ; acceleration frequency for 1 m2/s3 at 200~500HZ

扫描频率: 5 to 500Hz 随机振动, X, Y, Z 三垂直坐标轴向各振动 20 分钟,其中: 5~10HZ 频率范围的加速度频率为 10 m2/s3 , 10~200HZ 频率范围的加速度频率为 3 m2/s3, 200~500HZ 频率范围的加速度频率为 1 m2/s3

3.2.Drop in/跌落

1 Corner, 3 Edges, 6 Surfaces each once, Height: 100cm, on the cement plane

1 角, 3 棱, 6 面各一次, 跌落高度: 100 厘米, 跌落到水泥地板上

3.3.MTBF Qualification/平均间隔故障时间估算

The MTBF shall be at least 50,000hours at 25°C, Full load and normal input condition

平均间隔故障时间: 至少 50,000 小时,25°C 环境及额定输入与满载条件下

3.4.The lifetime electrolyte capacitor/电解电容寿命

The lifetime of electrolyte capacitor shall be at least 26280hours at 30°C of full load and 115Vac/230Vac input condition

电解电容寿命至少 26280 小时,30°C 环境及 115Vac/230Vac 输入与满载条件下

4、EMI/EMS Standards/EMI/EMS 标准

4.1.EMI Standards/EMI 标准

EN 55032: 2015
 EN 61000-3-2:2014
 EN 61000-3-3:2013
 满足最新标准

4.2.EMS Standards/EMS 标准

EN 61000-4-2:2009	Electrostatic Discharge(ESD): 8kV air discharge, 6kV contact discharge
EN61000-4-3 : 2006+ A1 : 2008 + A2: 2010	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN61000-4-4: 2012	Electrical Fast Transient/Burst-EFT ±2kV
EN 61000-4-5:2014	Surge Immunity Test: Differential mode ±1kV, Common mode ±2kV
EN61000-4-6: 2014	Conducted Radio Frequency Disturbances Test-CS
EN61000-4-8: 2010	Power Frequency Magnetic Field Test
EN61000-4-11:2004	Voltage Dips

5、Safety Standards/安规标准

5.1.Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 3000Vac / 3.5mA / 60 seconds
 Or 4242Vdc / 3.5mA / 60 seconds

初级对次级: 3000Vac / 3.5mA / 60 秒
 或 4242Vdc / 3.5mA / 60 秒

5.2.Leakage Current/漏电流

0.25mAmax. at 264Vac / 50Hz input/在输入 264Vac/50Hz 的条件下最大 0.25mA

5.3.Insulation Resistance/绝缘阻抗


100MΩ min. @ primary to secondary add a 500Vdc test voltage

在初级与次级间加 500Vdc 进行测试,最小 100MΩ

5.4.Regulatory Standards/安规标准


Type	Country	Standard	Type	Country	Standard
<input type="checkbox"/> UL/CUL	USA	UL60950-1	<input type="checkbox"/> PSB	Singapore	IEC60950-1
<input type="checkbox"/> TUV	Europe	EN60950-1	<input type="checkbox"/> PSE	Japan	J60950
<input checked="" type="checkbox"/> CCC	China	GB4943	<input type="checkbox"/> NOM	Mexico	NOM-001
<input checked="" type="checkbox"/> CE	Europe	EN60950-1	<input type="checkbox"/> GOST	Russia	MEK60950

6、Mach. Outline Drawing/外观图

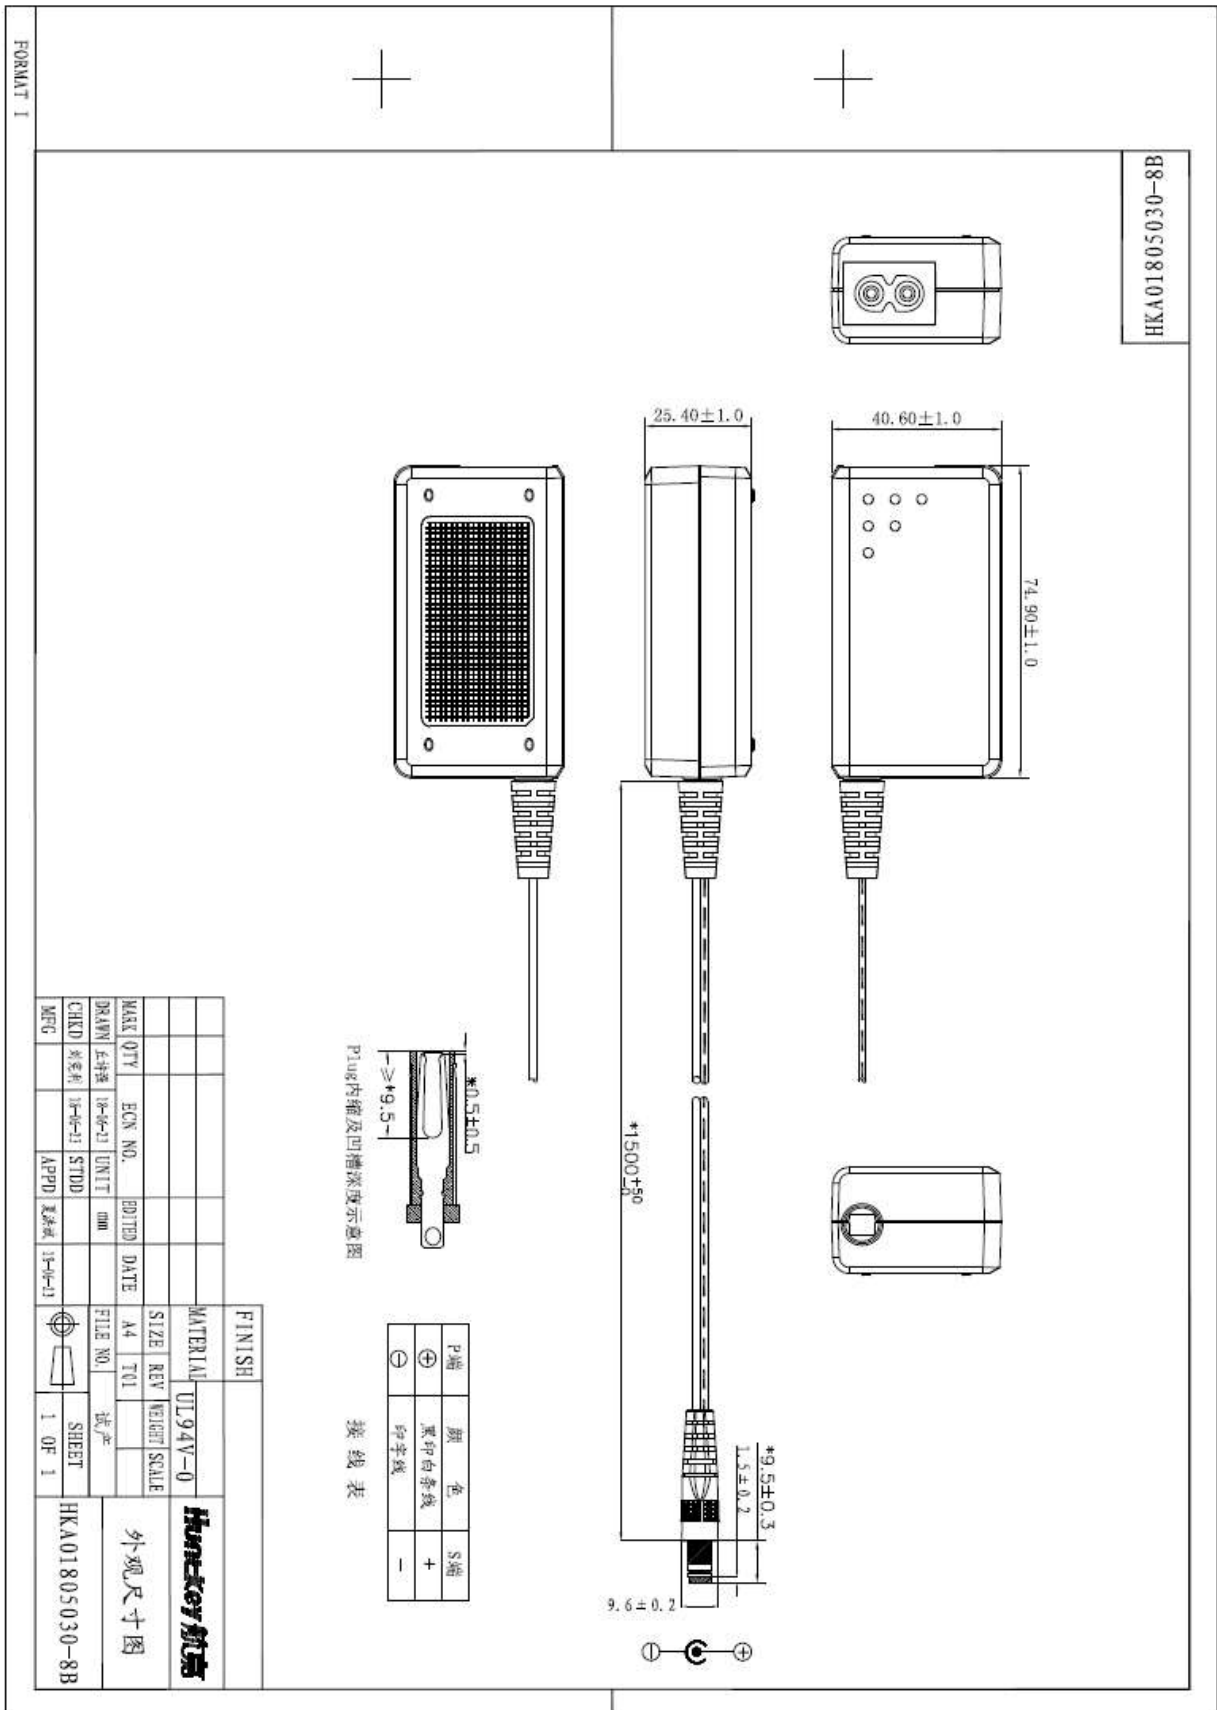

MATERIAL		UL94V-0	
FINISH			
SIZE	REV	WEIGHT	SCALE
A4	T01		
FILE NO.	试产		
DATE	13-06-13		
DRWING	ECN NO.	UNIT	MM
13-06-13			
CHKD	STDD		
13-06-13			
APPD			
13-06-13			
MFG			

P端	颜色	S端
⊕	黑印白条纹	+
⊖	印条纹	-



接线表

FORMAT 1

HKA01805030-8B

7、Label Drawing/标贴图

技术要求:

- 1、材质：**56#珠光合成纸**，表面过糊赛炫PET膜，
- 2、标贴需符合以下测试标准：先用一块蘸有清水的棉布擦拭15秒，然后用一块蘸有汽油的棉布擦拭15秒，标贴字迹和标志依然清晰，标贴不能出现翘边、掉边、模糊、并且不出现卷边。
- 3、**底色白字**，字迹清晰(**黑色号：PANTONE 428C;白色号：PANTONE White C**)。
- 4、正面背胶，粘性好；
 - 1)粘着力:以90度角，100mm/min的速度拉动(使用自动标贴拉力试验机)进行测试，胶底粘着力应满足大于等于1.0kgf/25mm；
 - 2)保持力:1KG/24H不脱落；
- 5、耐黄变测试，经过4.0°C到8.0°C高温冲击和持续8.0°C(4H)高温无起泡、起翘等不良。
- 6、切边笔直，无毛刺，颜色字体以封样为准。
- 7、编码规则:CODE-128,字体为Arial Unicode Ms,日期以供应商送货日为准。

图例:

编码规则:

A18D2J1123000001

a. 供应商代码 | b. 机种名称 | c. 客户代码 | d. 产品流水号 | e. 制造年月日

1.5 : 1

CAUTION/警告
非专业人士请勿开启此盖。
Shenzhen Hunkey Electric Co., Ltd.
深圳市宝安区西乡街道西乡社区西乡工业村西乡工业村西乡工业村西乡工业村西乡工业村
Hunkey Industrial Park, Xue-Xiang Village,
Baoan Road, Baoan, Shenzhen,
Guangdong 518102, P.R.China
Made in China/中国制造

Hunkey 航嘉 ADAPTER/电源适配器
MODEL/型号: HKA01805030-8D
INPUT/输入: 100-240V-0.5A 50/60Hz
OUTPUT/输出: 5.0V=3.0A
EFFICIENCY LEVEL/能效等级: ⑩

CE, CCC, RoHS, RECYCLE symbols and barcode A18D2J1123000001

FORMAT

MARK QTY	ECN NO.	UNIT	EDITED DATE	FILE NO.	SCALE
		mm			1:1
CHAWN 设计/廖	20180611		20180611		
CHKD 检查/刘	20180611		20180611		
MFG	APPD 廖品茂		20180611		

Hunkey 航嘉 标贴 HKA01805030-8D