

	PRODUCT SPECIFICATION	File: EA-750PX-A03
	Series: MVP P750 Model: HK850-92PP	Date: Jun. 23, 2017
SWITCHING POWER SUPPLY		Page: 1 of 7

1.0 INPUT:

1.1 VOLTAGE

	MINIMUM	MAXIMUM	UNITS
INPUT RANGE	90	264	Vrms
RATED RANGE	100	240	Vrms

1.2 FREQUENCY

47Hz ~ 63Hz

1.3 CURRENT

10A/100V, 5A/240V

1.4 INRUSH CURRENT

115V/65A(max.), 230V/130A(max.) at 25°C (cold start)

1.5 POWER EFFICIENCY

At 20%/50%/100% load AC 115V 60Hz and AC 230V 50Hz, the power efficiency should be at least 90%/92%/89%.

1.6 STANDBY MODE

During measurement of the "STANDBY MODE" condition, the main converter is off (PS_ON=High). +5Vsb converter is working and standby input power is measured.

Load Condition	Efficiiiency	Power in
<45mA	----	<0.45W
45mA	>=50%	----
100mA	>=55%	
250mA	>=65%	----
1.0A	>=75%	----
*2013 ErP Standby efficiency		

1.7 ACTIVE POWER FACTOR CORRECTION (PFC):

PFC at half/full load:

>0.95 at AC 110v 60Hz(typical)

>0.90 at AC 230v 50Hz(typical)

SWITCHING POWER SUPPLY	PRODUCT SPECIFICATION	File: EA-750PX-A03
	Series: MVP P750 Model: HK850-92PP	Date: Jun. 23, 2017
		Page: 2 of 7

2.0 OUTPUT:

GROUP	1				2
	+3.3V	+5V	+12V	-12V	+5VSB
MAX.LOAD	20A	20A	62A	0.3A	3.0A
MIN.LOAD	0A	0A	0A	0A	0A
VOLTAGE REGULATION	±3%	±3%	±3%	±10%	±5%
LOAD REGULATION	±0.5%	±0.5%	±0.5%	±3%	±3%
RIPPLE & NOISE (mV)	30	30	30	60	40
Capacitive Loads_(uF)	10000	10000	20000	330	10000

NOTE:

- The continuous maximum total output power shall not exceed 750W.
+12V DC maximum output power shall not exceed 62A(744W).
+3.3V and +5V DC maximum combined output power shall not exceed 100W.
- Maximum peak total DC output power should not exceed 825W.
- Peak power and current loading should be supported for a minimum of 1 second.
- +3.3V, +5V and +12V DC output voltage should be within Figure 1 cross loading range to meet regulation.
- Load regulation measuring the output voltage difference between 80plus 20% and 100% load.
- Ripple and Noise measuring with an oscilloscope with 20 MHz bandwidth in Figure 1 cross loading range. Output should be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system load. The length of ground wire on probe should not longer than 40mm, if a Non - differential type of scope was used.

2.1 CROSS REGULATION

The +5V & +3.3V combined load and +12VDC load shall remain within the defined in section 2.0 over cross load combinations shown Figure 1:

SWITCHING POWER SUPPLY	PRODUCT SPECIFICATION	File: EA-750PX-A03
	Series: MVP P750	Date: Jun. 23, 2017
	Model: HK850-92PP	Page: 3 of 7

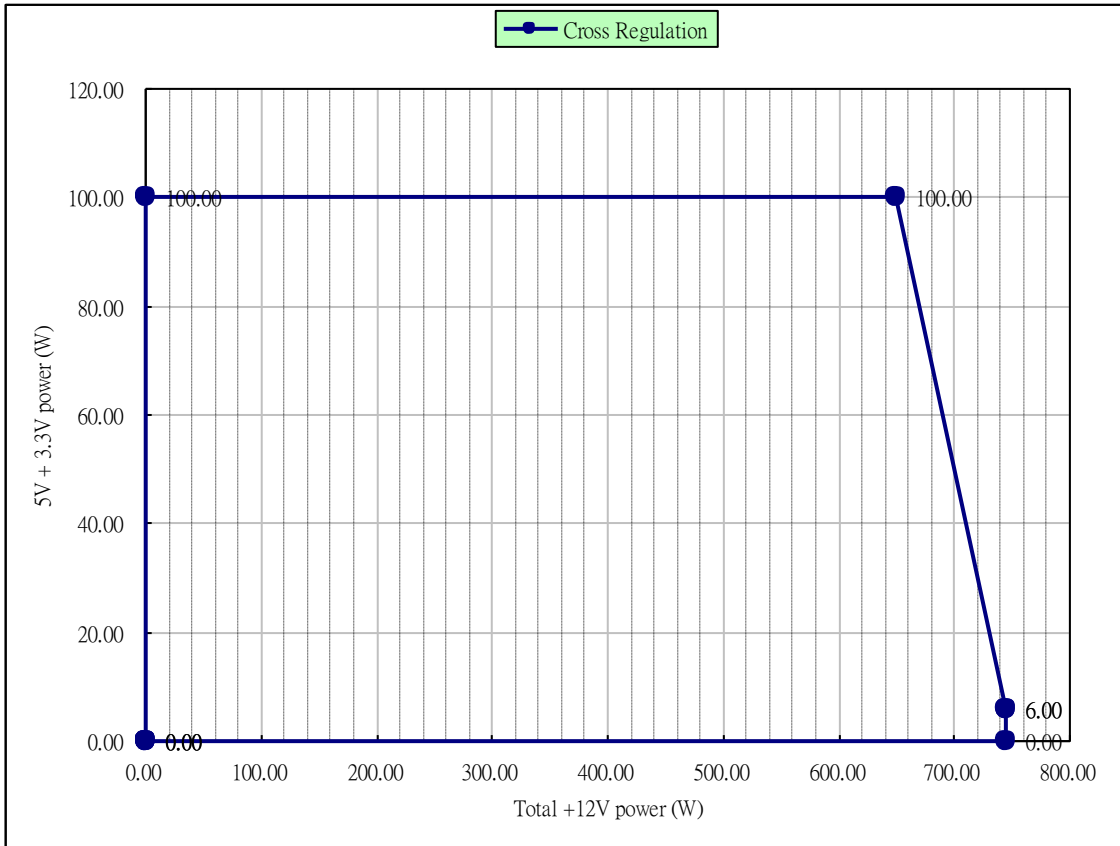


Figure 1

2.2 HOLD-UP TIME: 16ms(minimum)

Test Condition: Full load. AC input 115V or 230V, 47Hz .

2.3 LOAD TRANSIENT RESPONSE (STEP LOAD)


Step load changes up to 60%(12V) and 30%(3.3V and 5V) of full load, while other loads remains constant within the rating. The load waveform shall be a square wave with the slope of the rise and fall at 1.0A/usec and the frequency shall be from 50Hz to 10kHz. The DC output voltage will stay within regulation of $\pm 5\%$ during the step load changes.

2.4 OVERSHOOT

Overshoot at turn on or turn off shall be less than 10% of the nominal output voltage.

2.5 TIMING, HOUSEKEEPING AND CONTROL

A low active PS-ON (DC ON/OFF) input signal is equipped, which provide the interface **ENABLE** or to **DISABLE** the **GROUP1** of DC output. This signal is electrically to interface with **TTL, OPEN COLLECTOR** and the **HARD SWITCH**.

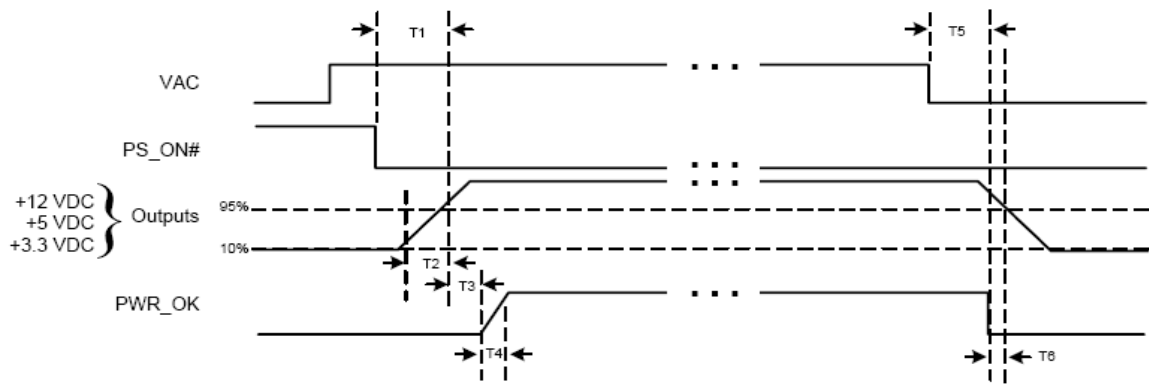

PWR_OK Sense level = 95% of nominal

T1: Power-on time
T2: Rise time
T3: PWR_OK delay
T4: PWR_OK rise time
T5: AC loss to PWR_OK hold-up time
T6: PWR_OK inactive to DC loss delay

SIGNAL NAME		MAXIMUM	MINIMUM
T1	PS_Power-on time	500mS	
T2	Rise time from each main output	20mS	0.2mS
T3	PWR_ok delay	500mS	100mS
T4	PWR_ok rise time	10mS	
T5	AC loss to PWR_OK hold-up time		16mS
T6	PWR_OK inactive to DC loss delay		1mS

2.5.1 POWER GOOD SIGNAL:

Signal Type: open collector +5DC, TTL compatible.

Logic Level: <0.4V while sinking 4 mA.

Logic Level High: between 2.4VDC and +5V output while sourcing 200 uA.

Max Ripple/Noise: 400mV pk-pk. (no capacitor test)

3.0 OUTPUT PROTECTION

3.1 TOTAL POWER PROTECTION: (OPP)

Total power 150% max with shut-down and latch off protection.

3.2 OVER VOLTAGE PROTECTION: (OVP)

SWITCHING POWER SUPPLY	PRODUCT SPECIFICATION	File: EA-750PX-A03
	Series: MVP P750	Date: Jun. 23, 2017
	Model: HK850-92PP	Page: 5 of 7

OUTPUT VOLTAGE	MAX. ACT. VOLTAGE	RESULT
+3.3V	4.3V	Shut down & Latch OFF The Group 1 DC Output
+5V	7.0V	
+12V	15.6V	
+5Vsb	7.0V	

3.3 SHORT CIRCUIT PROTECTION: (SCP)

The short between any output of group 1 will shut down all group 1.

The short at group 2 will Shut down both group 1 and group 2.

3.4 OVER CURRENT PROTECTION: (OCP)

Over current protection was designed to limit the current to operate within safe operating conditions.

All output rails except -12V, within 160% max. rating currents, latch off protection required with AC line or PS_ON reset. +5Vsb rail auto-restart upon removal of fault condition.

3.5 OVER TEMPERATURE PROTECTION: (OTP)

This power supply include an over-temperature protection sensor, which can trip and shut down the power supply at a preset temperature point. Such an overheated condition is typically the result of cooling fan failure or excessive maximum operation temperature.

3.6 NO-LOAD SITUATION

No damage or hazardous condition should occur with all the DC output connectors disconnected from the load. The power supply may latch into the shutdown state.

3.7 RESET AFTER SHUTDOWN

Whenever the power supply latches into shutdown state due to fault condition on its output, the power supply will return to normal operation only after the fault has been removed and the PS_ON# has been pulled low again. If the power supply latches into shutdown state due to fault condition on 5Vsb, the power supply will return to normal operation only after the fault has been removed and the power switch(power cord) has been cycled off/on(plugged out/in) with A MINIMUM OFF TIME OF 3 SECONDS.

SWITCHING POWER SUPPLY	PRODUCT SPECIFICATION	File: EA-750PX-A03
	Series: MVP P750	Date: Jun. 23, 2017
	Model: HK850-92PP	Page: 6 of 7

4.0 COOLING OF POWER SUPPLY

A DC fan was equipped to cooling the power supply, the fan will blow air into power supply and exhaust through the vent holes in AC receptacle side. **This fan is only for power supply internal cooling purpose, not for system cooling.**

Fan parameters:

Rated Voltage	12VDC
Dimension	120*120*25(mm)
Air flow	CFM min.
Noise	db(A)

5.0 ENVIRONMENT

5.1 OPERATING

AMBIENT OPERATION TEMPERATURE: 0 to 50 °C. (The rated power will derate from 100% to 80% from 40°C to 50 °C Linearly)

AMBIENT OPERATION RELATIVE HUMIDITY: To 85% relative humidity (non-condensing)

5.2 SHIPPING / STORAGE

AMBIENT STORAGE TEMPERATURE:-40 to 85 Deg C

AMBIENT STORAGE RELATIVE HUMIDITY: To 95% relative humidity (non-condensing)

6.0 MTBF

Over 100,000 hours at 25 Deg C. excluding the DC Fan.

7.0 EMC

CE Class B
FCC Class B

8.0 SAFETY

cUL
TUV
CB
CCC
BSMI
RCM

	PRODUCT SPECIFICATION	File: EA-750PX-A03
SWITCHING POWER SUPPLY	Series: MVP P750 Model: HK850-92PP	Date: Jun. 23, 2017
		Page: 7 of 7

9.0 MECHANICAL

Dimension: W 140mm x L 150mm x H 86mm, +/-1mm.

- 品牌: 航嘉(Huntkey)
- 商品名称: 航嘉 MVP P750
- 商品编号: 5762237
- 商品毛重: 2.98kg
- 商品产地: 中国大陆
- 货号: 6946333006996
- 转换效率: 白金牌(92%)
- 质保时间: 1-3 年
- 使用场景: 大型游戏/电竞
- 风扇启停: 是
- 电源功率: 701W-900W
- 电源尺寸: 标准电源(ATX)
- 接线类型: 全模组化

MVPLAND 电竞硬件联盟介绍



MVPLAND品牌精神

“知人者智、自知者明、胜人者有力，自胜者强”——老子《道德经》
释义：能够认识人自己、了解自己人，很明智、有智慧。
战胜别人的人有力量，而战胜自己的人，才是强者。

MVPLAND品牌文化

MVPLAND品牌基于PC DIY产品研发、设计、制造于一体的高科技企业，历经20年技术沉淀和对DIY玩家的深刻理解，应运而生的高端DIY游戏装备品牌。旨在为全球DIY玩家提供更加极致的游戏装备，打造全方位的高端游戏体验。

品牌：航嘉
型号：MVP P750
转换效率：92%
额定功率：750W

MVPLAND·电竞硬件联盟

再一次强势来袭



MVP P系列是航嘉精心为专业电竞玩家
打造的高配置游戏电源。电竞风格，
P系列产品满足全部游戏大作
全特效时各种苛刻用电需求。
诚意十足，只让您在电竞战场酣战淋漓！

☆ | COLLECTION
精 选 设 计

采用全模组线材接口、
全网管包裹，美观大方，
黑细沙纹漆更显高颜值



☆ | COLLECTION

精 选 品 质

大功率密度

14公分标准ATX电源实现了大功率输出，彰显航嘉精湛的电源研发设计能力



80+白金认证
高达92%转换效率

通过80 PLUS官方
白金牌认证，典型负载
下转换效率高达92%。



90-264V
全幅电压

还在为电压不稳造成
宕机的问题而烦恼吗？
这下再低的电压也难不倒我了！
支持90-260V输入电压范围



智能启停

创新智能启停开关技术，支持Fanless模式



Fanless激活模式：
电源出风口有风扇开关，
打开此功能后，室温35%
负载以下风扇不转，
输出零噪音。
高负载有散热需要时才转。

Fanless关闭模式

和普通电源一样，
一开机风扇就转。



- 日系电容+全固态电容 -
100%全日系105° C电容+100%固态电容，
铸造电源精品，性能稳定，
MTBF达10万小时。



全模组接口

全模组化接口设计
方便用户自由选择线材
机箱理线更简易方便

六大保护

OPP过功率保护
OVP过电压保护
UVP欠压保护
OCP过电流保护
SCP短路保护
OTP过温度保护
6大保护守护您的硬件装备
让您高枕无忧




- 每个细节，我们都精益求精 -

黑细沙纹漆
低调美观



LLC+DC-DC方案
高效的方案

输出滤波电容堆
有效降低输出纹波噪声
输出更纯净

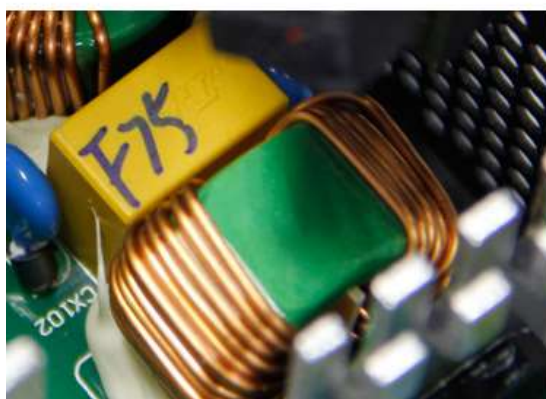

MTBF > 100000小时
主机平台运行
更加稳定可靠

☆ | COLLECTION
产品实拍






☆ | COLLECTION

规格参数

型号	MVP P750	风扇类型	液压
额定功率	750W	风扇转速	3000
风扇	12CM	背线支持	支持
彩盒	有	主板接口	20+4pin
AC电源线	AC线	处理器接口	2*(4+4)pin
转换效率	92%	显卡接口1	(6+2) pin*4
+12V供电能力	单路62A	显卡接口2	(6+2) pin*2
电压范围	90-264V	SATA	6个
PFC类型	主动	大4PIN	3个
电路结构	LLC+DC-DC	小4PIN	
机壳	黑色喷漆	其他认证	CCC (5000米)
I/O开关	有	尺寸	150*86*140(mm)

☆ | COLLECTION

产品线材

线材名称	接口数量	线材条数	长度示意
M/B (20+4) P	1	1	610mm 
CPU1(4+4) P	1	1	650mm 
CPU2(4+4) P	1	1	700mm 
显卡 (6+2) - (6+2) P	4	2	675mm 
显卡 (6+2) P	2	2	700mm 
SATA	2	1	450mm 
SATA	4	1	450mm 
大4P	3	1	450mm 