



40x40x10 mm SERIES

GENERAL SPECIFICATIONS

Frame&Impeller Material: Plastic(UL 94V-0)

Bearing Type: B: Dual ball bearing

S: Sleeve bearing


Lead Wires: UL 1007 AWG#26 OR Equivalent

Red Wire Positive(+)


Black Wire Negative(-)

Weight: 14g(0.49oz)

DIMENSIONS DRAWING

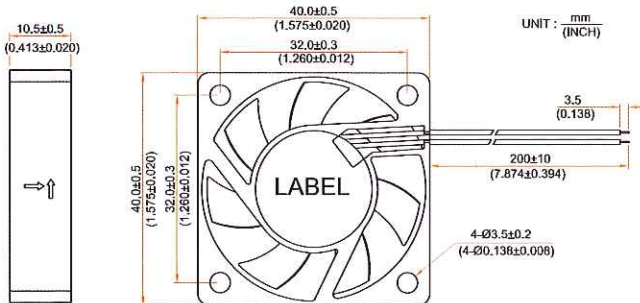

P-Q CURVE

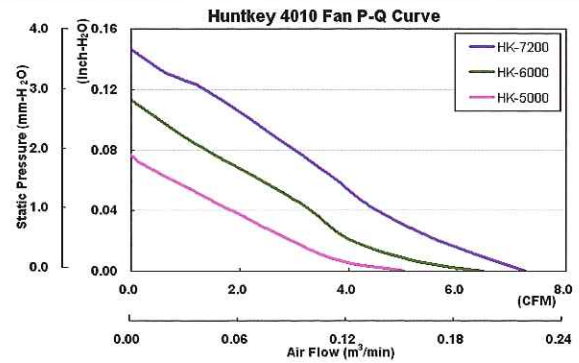

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mm-H ₂ O	Inch-H ₂ O	dB-A
AS4010L12	12	5.0 to 13.8	0.06	0.72	5000	0.142	5.03	1.94	0.076	25.5
AS4010M12	12	5.0 to 13.8	0.09	1.08	6000	0.184	6.50	2.87	0.113	31.7
AS4010H12	12	5.0 to 13.8	0.14	1.68	7200	0.206	7.27	3.72	0.146	35.5

*Function type is optional.

*The max. air flow and the speed are measured in free air; max. air pressure is measured at zero air flow.

*Noise is measured in anechoic chamber in free air, one meter from intake side.

*All readings are typical values at rated voltage.

*Specifications are subject to change without notice.

HUNTKEY ENTERPRISE GROUP

Add: Huntkey Industrial Park, Banxue Road, Bantian, Shenzhen, 518129, China

Tel: +86-755-89806666 Fax: +86-755-89606333 E-mail: markets@huntkey.com Website: www.huntkeydiy.com www.huntkey.com