


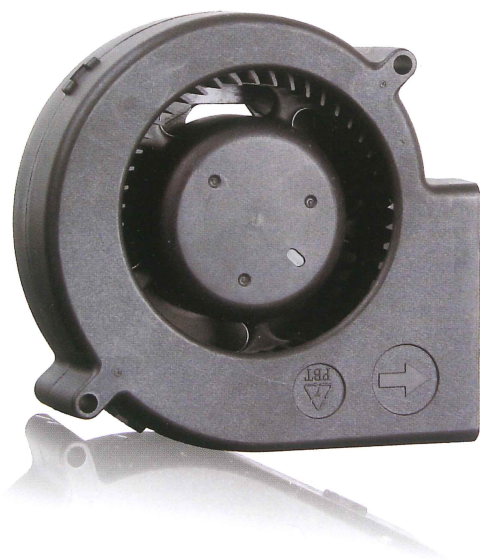

## 97x94x33 mm SERIES

### GENERAL SPECIFICATIONS

Frame&Impeller Material: Plastic(UL 94V-0)

Bearing Type: B: Dual ball bearing

S: Sleeve bearing


Lead Wires: UL 1007 AWG#24 OR Equivalent

Red Wire Positive(+)


Black Wire Negative(-)

Weight: 166g(5.85oz)

### DIMENSIONS DRAWING

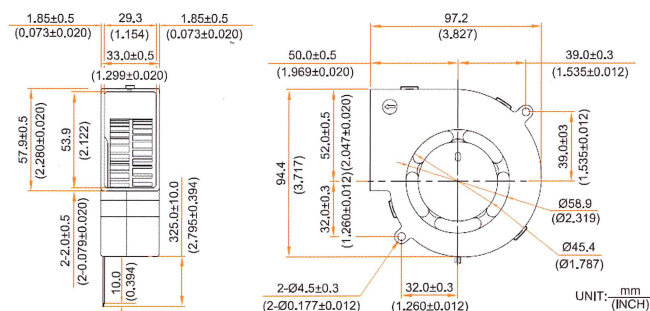

### P-Q CURVE

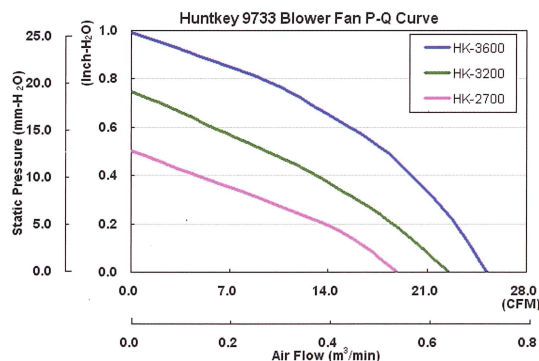

| MODEL     | Rated Voltage | Operating Voltage Range | Rated Current | Rated Input Power | Speed  | Maximum Air Flow |      | Maximum Air Pressure |                       | Noise |
|-----------|---------------|-------------------------|---------------|-------------------|--------|------------------|------|----------------------|-----------------------|-------|
| PART NO.  | VDC           | VDC                     | Amp           | Watt              | R.P.M. | m³/min           | CFM  | mm-H <sub>2</sub> O  | Inch-H <sub>2</sub> O | dB-A  |
| BS9733L12 | 12            | 5.0 to 13.8             | 0.32          | 3.84              | 2700   | 0.54             | 19.0 | 12.50                | 0.49                  | 45.0  |
| BS9733M12 | 12            | 5.0 to 13.8             | 0.58          | 6.96              | 3200   | 0.64             | 22.5 | 18.50                | 0.73                  | 50.0  |
| BS9733H12 | 12            | 5.0 to 13.8             | 0.79          | 9.48              | 3600   | 0.71             | 25.2 | 25.40                | 1.00                  | 53.0  |

\*Function type is optional.

\*The max. air flow and the speed are measured in free air; max. air pressure is measured at zero air flow.

\*Noise is measured in anechoic chamber in free air, one meter from intake side.

\*All readings are typical values at rated voltage.

\*Specifications are subject to change without notice.

## HUNTKEY ENTERPRISE GROUP

Add: Huntkey Industrial Park, Banxue Road, Bantian, Shenzhen, 518129, China

Tel: +86-755-89606666 Fax: +86-755-89606333 E-mail: markets@huntkey.com

Website: www.huntkeydiy.com www.huntkey.com

All rights reserved.

All images are for reference only!