

客户承认书

SPECIFICATION FOR APPROVAL

CUSTOMER/ 客户 : _____

CUSTOMER P.N./客户物料号 : _____

MODEL NO./ 产品型号 : HKA00505010-2D

APPROVAL NO./ 承认编号 : _____

PREPARED DATE/拟定日期 : 2011-2-17

CUSTOMER AUTHORIZED SIGNATURE/客户承认签核		

Please return to us one copy of "SPECIFICATION FOR APPROVAL" with you approved signature./ 客户确认签字，盖章后请回传一份承认书给我司。

ADD: Huntkey Park, Banxue Road, Bantian, Shenzhen,
Guangdong, P. R. China

TEL: 0755-89606666

P.C.: 518129

FAX: 0755-89606333

<http://www.huntkey.com>

拟 制 :

审 核 :

批 准 :

Contents/目录

1. SCOPE/概述.....	3
2. Input Characteristics/输入特性.....	3
3. Output Characteristics/输出特性	4
4. Protection Requirements/保护要求	4
5. Environment Requirements/环境要求.....	5
6. Reliability Requirements/可靠性要求.....	5
7. EMI/EMS Standards/EMI/EMS 标准	5
8. Safety Standards/安规标准	6
9. Mach. Outline Drawing/外观图	7
10. Label Drawing/标贴图	8
11. Package Drawing/包装图.....	エラー! ブックマークが定義されていません。

1. SCOPE/概述

The document details the electrical, mechanical and environmental specifications of a SMPS, the power supply provides 5.0 W continuous output powers.

资料详细描述了一款 5.0W(连续输出功率)开关电源的电气性,结构性及环境等要求.

The power supply shall meet the RoHS requirements.

此款电源符合 RoHS 要求.

Description/描述:

- SMPS Adaptor(Wall mount)/插墙式适配器 SMPS Adaptor(Desk-top)/桌面型适配器
 Open Frame/开放式结构 SMPS Unit (With Case)/带铁壳型
 Others/其他

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac with a single phase.

输入电压范围: 从 90Vac 到 264Vac, 单相输入.

	Minimum/最小	Rating/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100Vac~240Vac	264Vac
Input Frequency/输入频率	47Hz	60Hz/50Hz	63Hz

2.2. Input AC Current/输入交流电流

0.25Amax. @ 90Vac input & Full load

在 90Vac 输入和满载条件下输入电流最大 0.25A

2.3. Inrush Current (cold start)/浪涌电流(冷启动)

30Amax. @ 132Vac input/在 132Vac 输入条件下最大 30A

30Amax. @ 264Vac input/在 264Vac 输入条件下最大 30A

2.4. Average Efficiency /平均效率

While input 115Vac and 230Vac, the average efficiency is more than 68.17%.The test point is at 25%, 50%, 75% and 100% of max load respectively.

在输入 115Vac 和 230Vac 条件下,平均效率不小于 68.17%。测试点分别是最大载的 25%,50%,75%和 100%。

2.5. No-Load Input Power Dissipation/输入空载功率损耗

While input 115Vac or 230Vac and the output is no load, the input power loss must be less than 0.30W.

在输入 115Vac/230Vac, 空载功耗小于 0.30W.

2.6.Flow Backward Electric Current Tests/倒灌电流测试

When cut down AC power, input 0~5Vdc power into charger, the current should less than 5mA.

当充电器不接交流电的条件下,在充电器输出端加入 0~5Vdc 直流电压,通过充电器的电流应小于 5mA。

3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性<输出&纹波+噪音>

Output	Rated Load/额定负载		Peak Load	Output Range 输出电压范围	R+N 纹波与噪声	Remark 备注
Rating	Min. Load	Max. Load				
+5.0V	0.0A	1.0A	/	4.75V ~ 5.25V	100mVp-p	

Ripple & Noise: Tested by a oscilloscope using 20MHz bandwidth and the output is paralleled a 0.1uF ceramic capacitor and a 10uF electrolysis capacitor.

纹波与噪声: 量测时示波器选用 20MHz 带宽限制,输出端要并联一颗 0.1uF 的陶瓷电容和一颗 10uF 的电解电容

2PIN 与 3PIN 短路

3.2. Line/ Load Regulation/线性/负载调整率

Output	Load Condition/负载条件		Line Regulation 线性调整率	Load Regulation 负载调整率	Remark 备注
Rating	Min. Load	Max. Load			
+5.0V	0.0A	1.0A	±2%	±5%	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @ 90Vac input & Full load/在 90Vac 输入和满载条件下最大 3S

3.4. Hold-up Time/关机维持时间

10mS min. @ Full load & 115Vac/60Hz input turn off at worst case

在 115Vac/60Hz 输入, 满载同时最差情况下关机, 最小 10mS

20mS min. @ Full load & 230Vac/50Hz input turn off at worst case

在 230Vac/50Hz 输入, 满载同时最差情况下关机, 最小 20mS

3.5. Rise Time/上升时间

30mS max. @ Full load/在满载条件下最大 30mS

3.6. Fall Time/下降时间

20mS max. @ Full load/在满载条件下最大 20mS

3.7. Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off/当电源开、关机时最大 10%

3.8. Output Load Transient Response/输出负载瞬态响应

Output voltage is within 4.5-5.5V while the load step is from 20% to 80% of max load, R/S: 0.5A/uS, frequency: 100Hz and 8mS duration at 80% of max load.

输出电压在 4.5-5.5V 之间,负载变化: 从最大载的 20%到 80%,斜率: 0.5A/uS,频率: 100Hz, 80%负载持续时间为 8mS.

3.9. Capacitance Load/容性负载

While input 90Vac~264Vac and capacitance load is 1000uF,the adapter can turn on normally and the output is in the rated range.

在输入 90Vac~264Vac, 1000uF 容性负载条件下, 适配器能正常开机。并且输出电压范围在额定范围内。

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

OCP range Limited: 1.1A~1.5A/过流保护点限制: 1.1A~1.5A。

The output shall hiccup when the over current applied to the output, and shall be self-recovery when the fault condition is removed

当过电流时,输出将进入打嗝模式,当过流情况解除后,产品将会自动恢复正常

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output is short to GND; the power supply shall not damage, and shall be self-recovery when the fault condition is removed

当输出对地短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常

4.3. Over Voltage Protection/过压保护

The power supply shall be protected when the output is over voltage, and the power supply shall not be damaged

当输出过压时,产品保护且不会损伤

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温度和湿度要求

0°C to +40°C, 20%RH to 80%RH

工作环境温度为 0°C~+40°C, 湿度为 20%~80%

5.2. Storage Temperature and Relative Humidity/存储温度和湿度要求

-30°C to +70°C

10%RH to 90%RH (non-condensing) @ Sea level shall below 10,000 feet

在海拔低于 10,000 英尺的条件下,低温存储下限为-30°C(无结冰环境);高温存储上限为 +70°C,相对湿度为 10%RH to 90%RH。

6. Reliability Requirements/可靠性要求

6.1. MTBF Qualification/平均间隔故障时间估算

The MTBF shall be at least 50,000 hours at 25°C, Full load and normal input condition

平均间隔故障时间:至少 50,000 小时,25°C 环境及额定输入与满载条件下

6.2. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G (Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z

扫描频率: 10 to 300Hz, 加速度: 1.0G(位移: 3.5mm), X, Y, Z 三垂直坐标轴向各振动 1 小时。

6.3. Drop in/跌落

1 Corner, 3 Edges, 6 Surfaces, Height: 100cm, On the cement plane.

1 角, 3 棱, 6 面, 跌落高度: 100 厘米, 跌落到水泥面上。

6.4. AC PIN 折叠

AC 插头在折叠 5000 次后, 接触弹片的焊盘不脱落无裂痕,电性能正常。

7. EMI/EMS Standards/EMI/EMS 标准

7.1. EMI Standards/EMI 标准

EN 55022:1998, +A1:2000 +A2:2003, Class B

CISPR 22:2003, Class B

AS/NZS CISPR 22: 2004, Class B

7.2. EMS Standards/EMS 标准

EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EN 61000-4-2	Electrostatic Discharge(ESD): 8kV air discharge, 6kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient/Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 1kV, line to earth 2kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips

8. Safety Standards/安规标准

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 3000Vac / 3.5mA / 60 seconds (3 seconds for production)

Or 4242Vdc / 3.5mA / 60 seconds (3 seconds for production)

初级对次级: 3000Vac / 3.5mA / 60 秒(生产时高压测试时间: 3 秒)

或 4242Vdc / 3.5mA / 60 秒(生产时高压测试时间: 3 秒)

8.2. Leakage Current/漏电流

0.25mAmax. at 264Vac / 50Hz input/在输入 264Vac/50Hz 的条件下最大 0.25mA

8.3. Insulation Resistance/绝缘阻抗


20MΩ min. @ primary to secondary add a 500Vdc test voltage

在初级与次级间加 500Vdc 进行测试,最小 20MΩ

8.4. Regulatory Standards/安规标准

Type	Country	Standard	Type	Country	Standard
<input type="checkbox"/> UL/CUL	USA	UL60950-1	<input type="checkbox"/> PSB	Singapore	IEC60950-1
<input type="checkbox"/> TUV	Europe	EN60950-1	<input checked="" type="checkbox"/> PSE	Japan	J60950
<input type="checkbox"/> CCC	China	GB4943	<input type="checkbox"/> NOM	Mexico	NOM-001
<input type="checkbox"/> CE	Europe	EN60950-1	<input type="checkbox"/> GOST	Russia	MEK60950

9. Mach. Outline Drawing/外观图

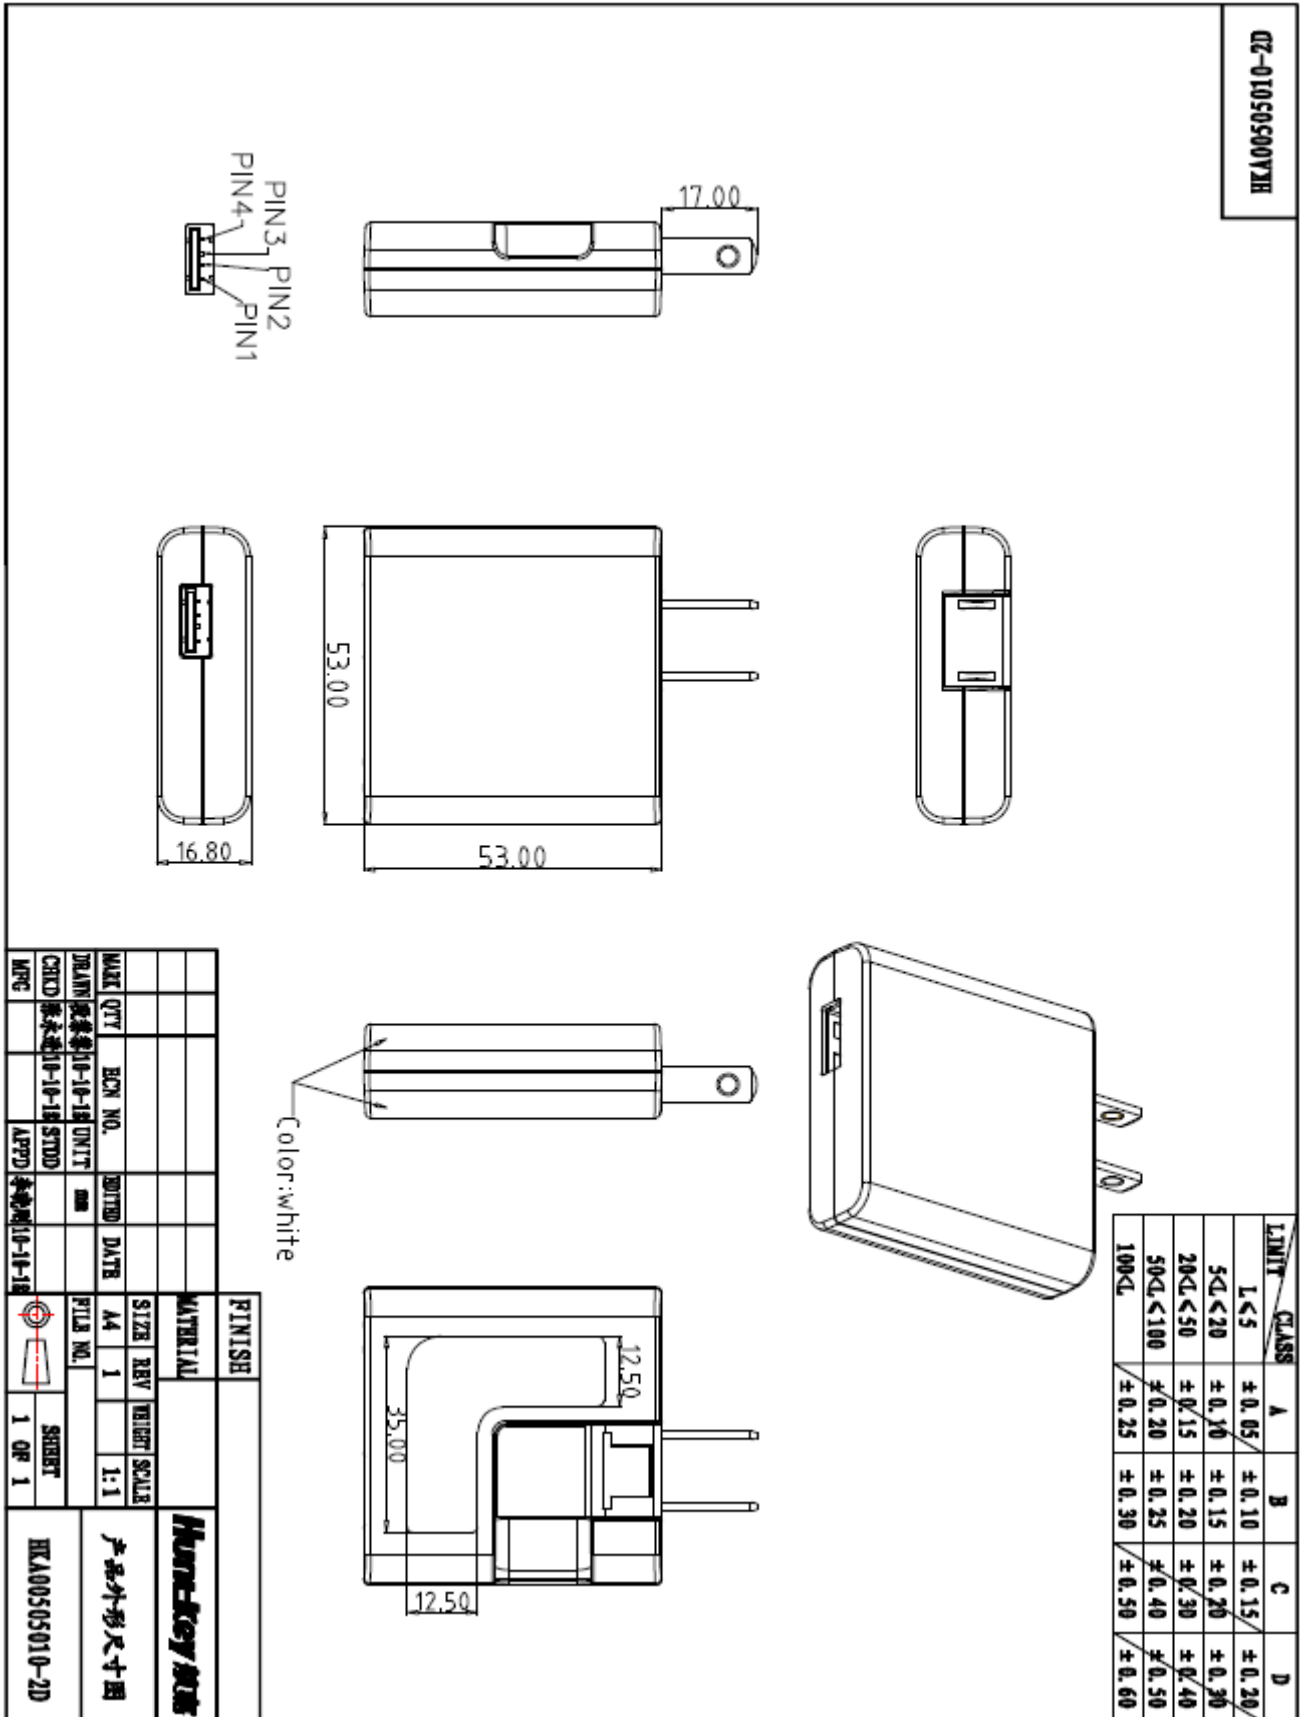

10. Label Drawing/标贴图